
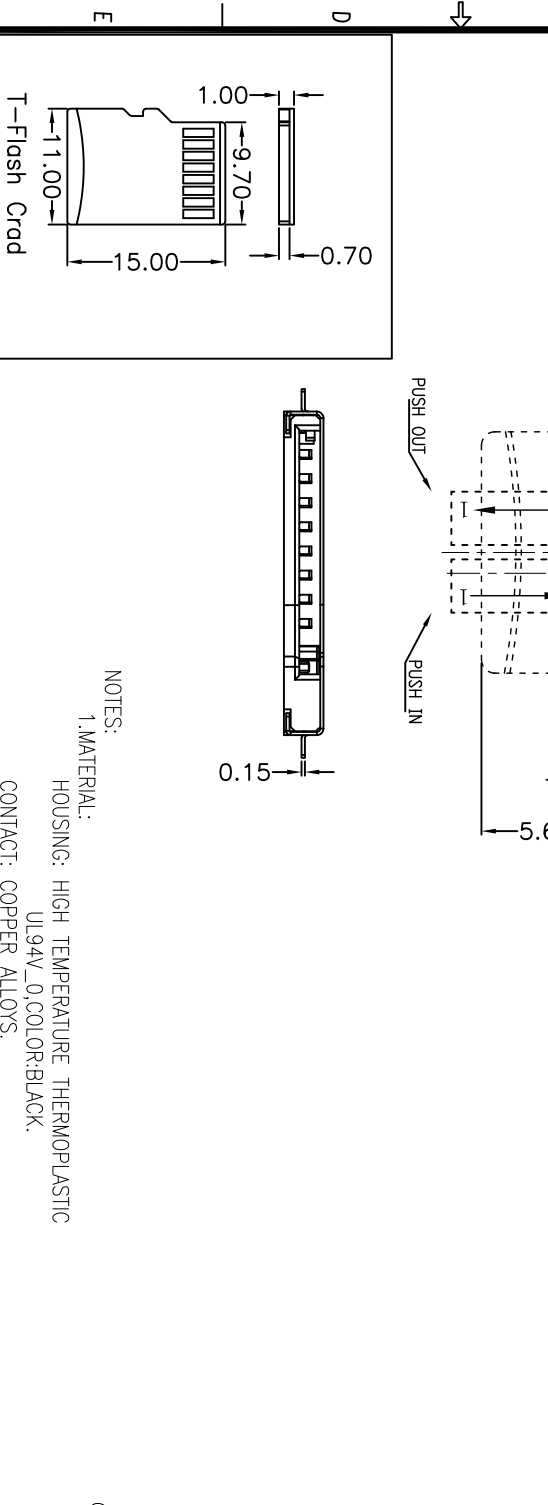


REV.	DESCRIPTION	APPD	DATE
△1	錫焊加管控尺寸1.30±0.10	伍彪	2013-11-13

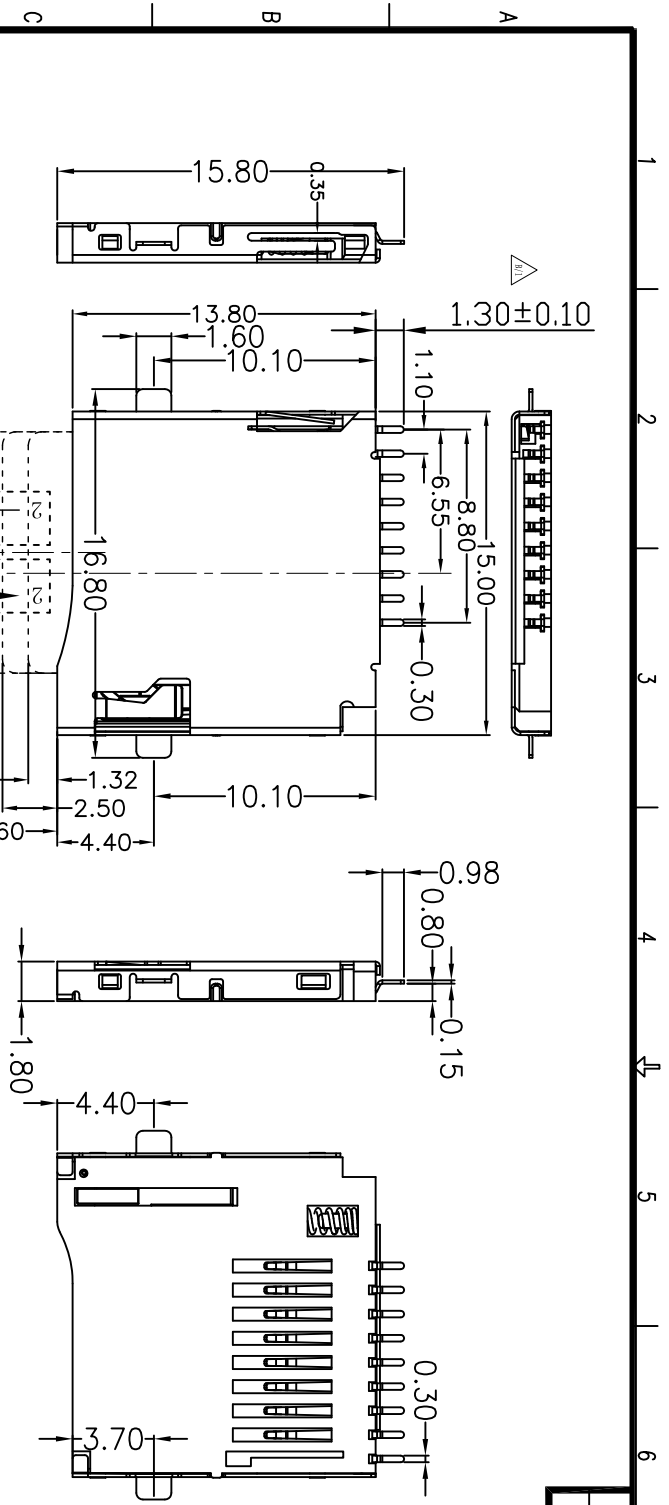

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

NOTES:
1.MATERIAL: HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.

2.PLATING: CONTACT: COPPER ALLOYS.
COVER: COPPER ALLOYS OR STEEL.
UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.
3.MULTIMEDIA CARD COMPATIBLE

PIN NO.	NAME	TYPE	DESCRIPTION
1	DATE2	I/O/PP	DATE LINE(BIT2)
2	CD/DATE3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATE0	I/O/PP	DATE LINE(BIT0)
8	DATE1	I/O/PP	DATE LINE(BIT1)

PART NO:		MATERIAL:	
FC6A-S1S1-2000-A		FC6A-S1S1-2000-A	
LOT NO:	FINSH:	DR:	TITLE:
		物 凱 0112'13	沉板 0.8mm T-FLASH CRAD CONN
UNIT:	SIZE:	CHK:	DWG NO:
MM	A4		FP-090012
TOLERANCES:		SCALE:	SHEET:
X.X=±0.35	GENERAL ANGLE: X.X=±3.0°	1:1	1 OF 1
X.XX=±0.25	X.XX=±12.0°		
X.XXX=±0.15			

东莞市高敏达电子科技有限公司

REV: C/0