




REV.	DESCRIPTION	APPD	DATE

NOTES:


1. MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.
CONTACT: COPPER ALLOYS,
COVER: COPPER ALLOYS OR STEEL.
2. PLATING:
UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.
3. MULTIMEDIA CARD COMPATIBLE

订购须知:


- SMPX1-SIS1-2000-A
- 1 无定位柱
 - 2 有定位柱
 - 1 外壳无孔
 - 2 外壳有孔
 - 0 正贴
 - 1 反贴

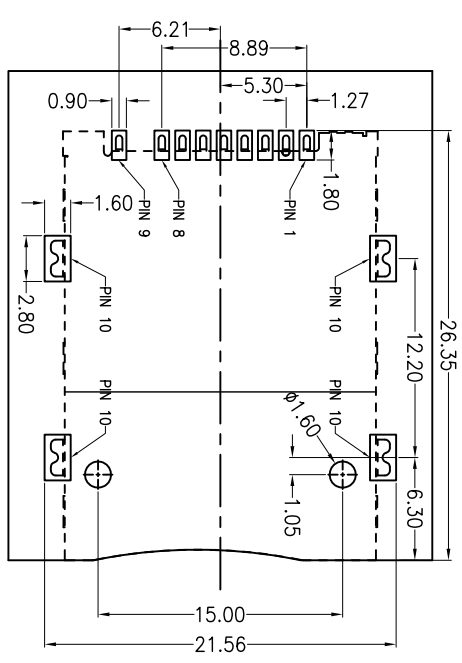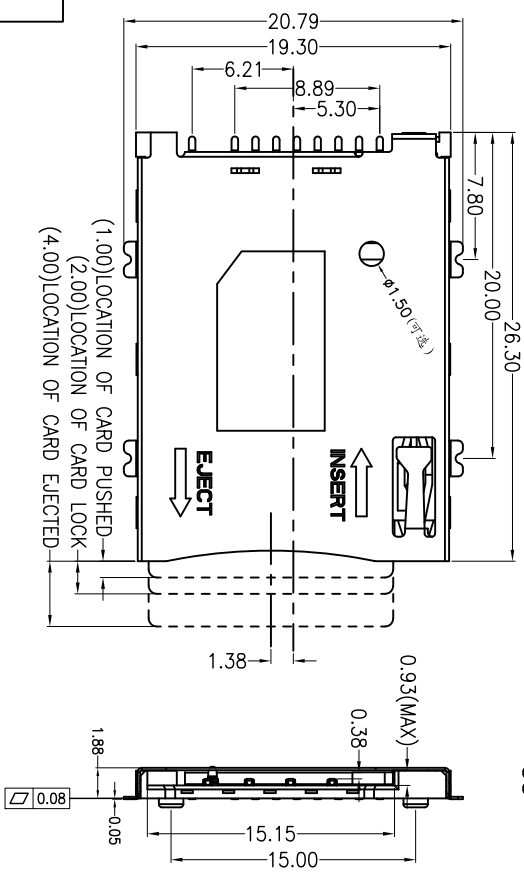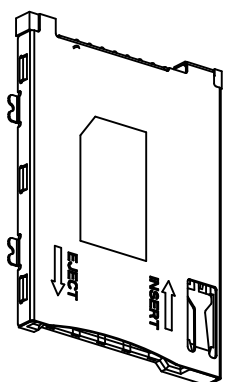

RECOMMENDED P. C. B. HOLE LAYOUT
COMPONENT SIDE VIEW (TOLERANCE: +/-0.05)






PIN NO.	NAME
PIN 1	VCC
PIN 2	GND
PIN 3	RST
PIN 4	VPP
PIN 5	CLK
PIN 6	I/O
PIN 7	DATO
PIN 8	MCMD
PIN 9	CARD DETECT Switch
PIN 10	GND

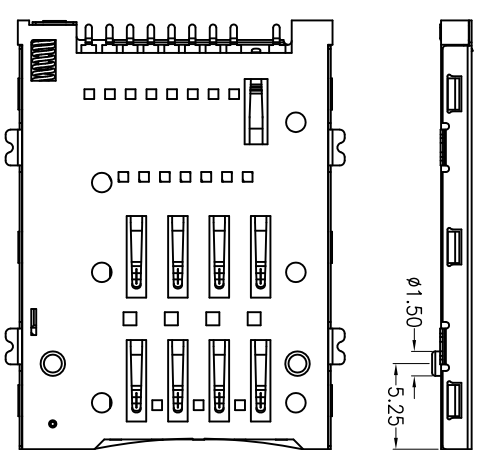

PART NO: SMPX-SIS1-2000-A		MATERIAL:	
LOT NO: XXX	UNIT: mm	FINISH:	DR: 杨帆 020711
SIZE: A4	COLOR:	TITLE: SIM PUSH-PUSH卡座 1.9H	
TOLERANCES: GENERAL		CHK: X-XXXXXX	DWG NO: X-XXXXXX
X.X=±0.35	ANGLE: X.X=±3.0°	APP: 1:1	SCALE: 1:1
X.XX=±0.25	X.XX=±2.0°	SHEET: 1 OF 2	REV: C/0
X.XXX=±0.15			

东莞市高敏达电子科技有限公司

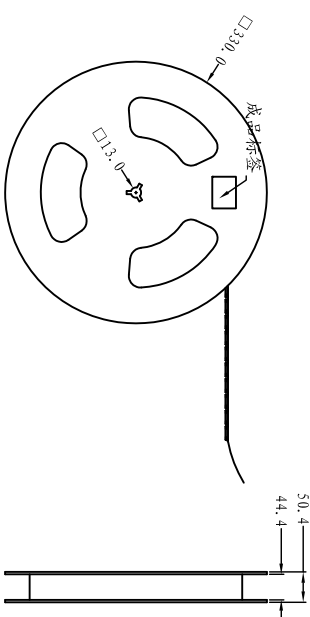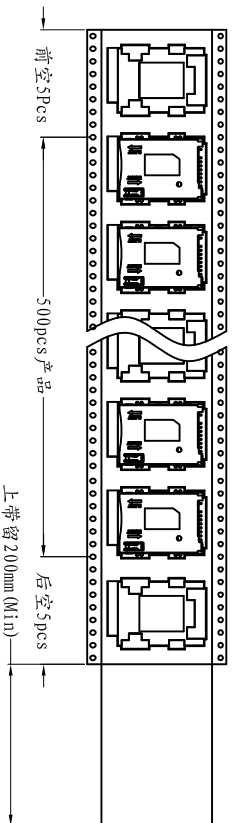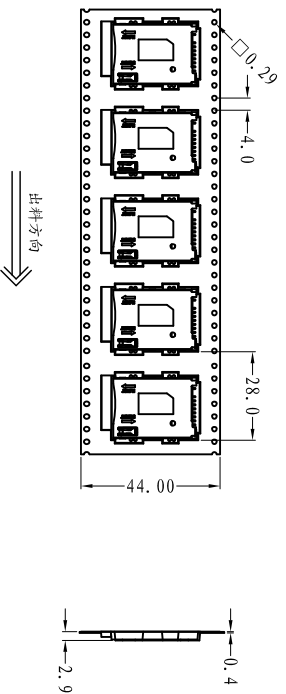



NO. 1

NO. 2



纸箱规格: 350*350*385

NO. 4

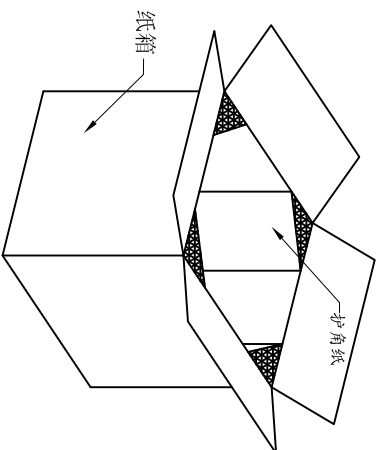

NO. 3

1. 材质要求:
- 1.1 纸箱的材质为K=K; 外形尺寸为35*35*38.5;
 - 1.2 卷盘的材质为PS, 卷盘的外形尺寸为 $\phi 330*30.4$;
 - 1.3 卷带的材质为PS, 卷带的外形尺寸为20200*24.00*3.0mm;
2. 包装方式:
- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品500PCS, 再后空5PCS; 上带留200mm长度。
 - 2.2 将包装好的产品从包装机上取下并包装好, 贴上内盘标签;
 - 2.3 把累叠好的7盘叠放入纸箱中共计4.9Kset, 上下放纸板, 纸箱四个角塞护角纸;
 - 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

订购须知:

SMPXX-SIS1-2000-A

- 1 无定位柱
- 2 有定位柱

- 1 外壳无孔
- 2 外壳有孔

PART NO: SMPXX-SIS1-2000-A		MATERIAL:		东莞市高敏达电子科技有限公司	
LOT NO: XXX	FINISH:				
UNIT: mm	SIZE: A4	DR: 杨帆 030111	TITLE: SIM PUSH-PUSH卡座 1.9H		
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°		DWG NO: X-XXXXXX	REV: C/0
APP:	SCALE: 1:1	SHEET: 2 OF 2			

